


GLOBE VALVES

1031

PEGLER PN32 RATED GLOBE VALVE

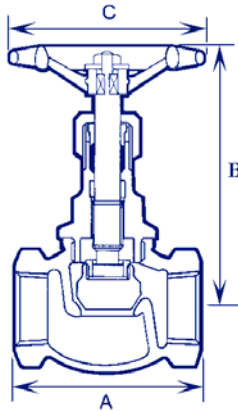

Part No. 1031

BRONZE BODY WITH BSP THREADED CONNECTIONS

BSP	1/2	3/4	1	1 1/4	1 1/2	2
A	57	65	78	89	100	121
B	95	98	114	138	159	170
C	75	75	85	95	105	120

This robustly manufactured screwed bonnet globe valve with a metal valve disc is ideally suited for isolation duty, providing a leak-tight shut off with the capability of being used partially open to regulate flow.

Features & Benefits

- Specifications to BS5154 series B.
- Metal valve seat & disc.
- Screwed bonnet.
- Rising stem.

Pressure & Temperature

Pressure range:-
PN32 Rated

Temperature Range:-
32 bar @ 0°C to 100°C.
14 bar @ 198°C.

MATERIALS

Body	Bronze
Bonnet	Brass
Stem	Brass
Disc	Brass