


GLOBE VALVES

1029

PEGLER RENEWABLE DISC GLOBE VALVE

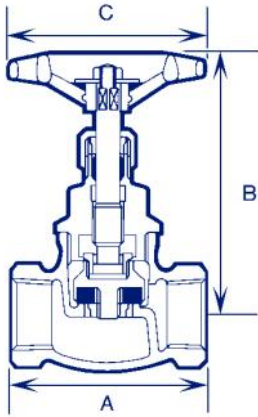

Part No. 1029

BRONZE BODY WITH BSP THREADED CONNECTIONS

BSP	1/4	3/8	1/2	3/4	1	1 1/4	1 1/2	2
A	44	46	57	65	78	89	100	121
B	76	76	95	98	114	138	159	170
C	60	60	75	75	85	95	105	120

This robustly manufactured screwed bonnet globe valve with a PTFE valve disc is ideally suited for isolation duty, providing a leak-tight shut off with the capability of being used partially open to regulate flow.

Features & Benefits

- Specifications to BS5154 series B.
- Renewable PTFE valve disc.
- Screwed bonnet.
- Rising stem.

Pressure & Temperature

Pressure range:-
PN32 Rated

Temperature Range:-
32 bar @ 0°C to 100°C.
14 bar @ 198°C.

MATERIALS

Body	Bronze
Bonnet	Brass
Stem	Brass
Disc	PTFE