


GLOBE VALVES

JV1051

FLANGED PN16 RATED GLOBE VALVE

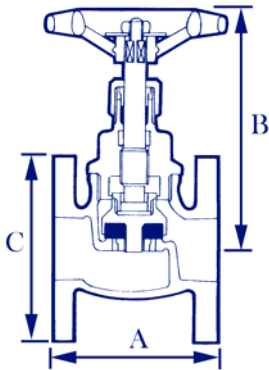

Part No. JV1051 BRONZE BODY WITH FLANGED CONNECTIONS

SIZE	DN15	DN20	DN25	DN32	DN40	DN50	DN65	DN80	DN100
A	70	90	98	110	130	150	190	210	220
B	76	93	110	120	130	160	230	250	280
C	95	105	115	140	150	165	185	200	220

An economical globe valve with a PTFE valve disc which is ideally suited for isolation duty, providing a leak-tight shut off with the capability of being used partially open to regulate flow.

Features & Benefits

- Rising stem.
- Screwed bonnet.
- PTFE valve disc.
- Flexible stem-disc coupling.

Pressure & Temperature

Pressure range:-
PN16 Rated

Temperature Range:-

Water/Steam/Air
-10°C to 150°C.

Gasolines
-10°C to 90°C.

MATERIALS

Body	Bronze
Bonnet	Brass
Stem	Brass
Disc	PTFE

**THIS PRODUCT IS GENERALLY HELD IN STOCK WITH FLANGES UNDRILLED TO
ENABLE US TO DRILL TO YOUR REQUIREMENTS**