

BALL VALVES

BV2000

THREE WAY 'L' & 'T' PORTED ISO PAD BALL VALVE



Part No. BV2000L & BV2000T

FULL BORE WITH ISO5211 PAD & BSP THREADED CONNECTIONS

BSP	1/4	3/8	1/2	3/4	1	1 1/4	1 1/2	2
A	67	67	77	87	105	122	138	166
B	63	63	64	75	80	93	114	124
C	120	120	120	170	170	170	230	230
D	33.5	33.5	38.5	43.5	52.5	61.2	69.2	83

The BV2000 brass bodied full bore three way ball valves are suited for general purpose applications.

These valves are particularly versatile as they offer the advantages of four diverting positions.

Full bore construction minimises headloss and the hard chrome plated ball offers excellent wear resistance.

There is two options available with 'L' or 'T' port configurations.

Features & Benefits


- ISO5211 mounting pad.
- 'L' or 'T' ported options.
- Suitable for various duties.
- Full bore.
- Lever operated.

Pressure & Temperature


PN32 Rated
16 bar at 150°C.
32 bar at -20°C to 90°C.

MATERIALS	
Body	Brass Nickel Plated
Ball	Brass Hard Chrome Plated
Seats	P.T.F.E.
Lever	Plated Steel

'L' PORT BALL POSITIONS

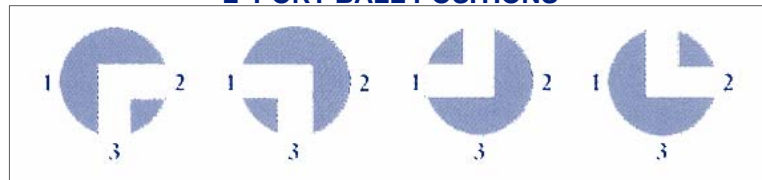

'T' PORT BALL POSITIONS

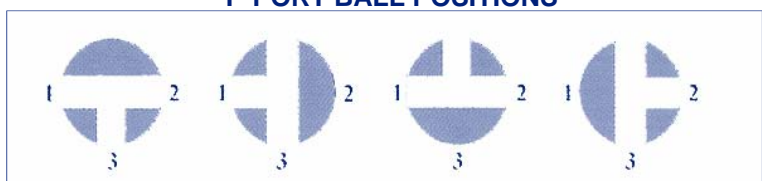

THESE VALVES CAN BE SUPPLIED WITH
ELECTRIC PNEUMATIC OR HYDRAULIC
OPERATED ACTUATORS