


ASCO JOUCOMATIC NUMATICS

262

DIRECT OPERATED GENERAL PURPOSE SOLENOID VALVES

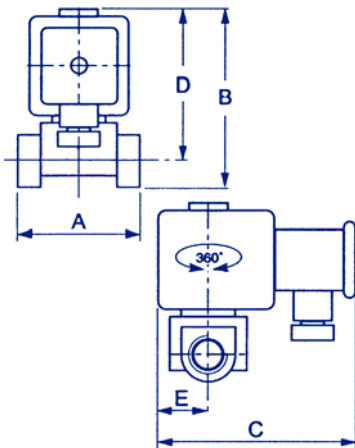

Part No. 262

2/2 NORMALLY CLOSED & NORMALLY OPEN, BRASS BODY

The Asco 262 series are compact, direct acting valves offering a long continuous cycling life in a wide range of applications.

When ordering, please indicate the voltage and frequency required to operated the coil.

Features & Benefits

- Compact design.
- No minimum operating pressure.
- Long service life.
- Suitable for outdoor applications.
- Wide range of standard voltages.
- Spare part kits & coils available.

Pressure & Temperature

Pressure Range:-
See Selection Chart Below.

Fluid temperature:-
-20°C to 90°C.

Ambient temperature:-
-20°C to 75°C.

MATERIALS

Body	Brass
Seals	Nitrile (NBR)

BSP	ORIFICE SIZE	BODY MATERIAL	OPERATING PRESSURES (Bar)							DIMENSIONS					CODE NUMBER
			MIN	MAX A/C~	AIR =D/C	MAX A/C~	WATER =D/C	MAX A/C~	OIL =D/C	A	B	C	D	E	
2/2 NORMALLY CLOSED															
1/4	2.4	Brass	0	25	10	25	8	11	8	40	75	75	65	20	SCG262C020
1/4	3.2	Brass	0	9	4	11	4	6	4	40	75	75	65	20	SCG262C022
1/4	3.2	Brass	0	-	-	11	4	-	-	40	75	75	65	20	SCG262C022BW*
1/4	5.6	Brass	0	6.5	1.7	6.5	1.7	6.5	1.7	40	79	80	69	23	SCG262C208
1/4	7.1	Brass	0	1.8	1	2.5	1	1.9	1	40	75	79	65	20	SCG262C090
2/2 NORMALLY OPEN															
1/4	3.2	Brass	0	9	5.5	7	4	6.5	4	40	79	80	69	23	SCG262A262
1/4	5.6	Brass	0	3	1.7	2.5	1.3	2.5	1.3	40	79	80	69	23	SCG262A264

* WRAS approved EPDM seals & supplied with anti-water hammer device as standard.

Options & Accessories

EPDM, FPM & PTFE Seals
Waterproof Enclosure With Imbedded Screw Terminals (IP67)
Explosion Proof Enclosures
Mounting Bracket

STANDARD VOLTAGES

A/C	24V/50Hz	48V/50Hz	115V/50Hz	230V/50Hz
D/C	24V	48V		

Other Voltages & Frequencies Available On Request

**THESE ARE THE STANDARD VALVES IN THE RANGE, OTHERS ARE
AVAILABLE, CONTACT SALES WITH YOUR REQUIREMENTS**