


ABS & uPVC VALVES

DVD RANGE

uPVC DOUBLE UNION DIAPHRAGM VALVE

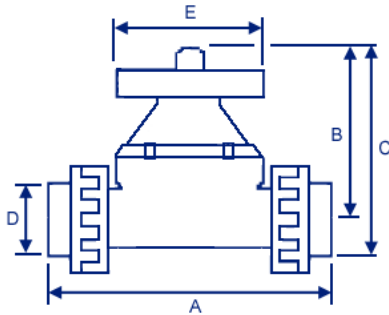

Part No. DVD-13P (uPVC BODY WITH EPDM DIAPHRAGM)

Part No. DVD-33P (uPVC BODY WITH FPM-VITON DIAPHRAGM)

DOUBLE UNION DIAPHRAGM VALVE WITH SOLVENT WELD ENDS

These diaphragm valves are ideal in applications that require flow regulation and a tight shut off.

uPVC is lightweight and has excellent resistance to chemicals and abrasion, is tasteless and odourless making it ideal for use with potable water systems and most food products. uPVC is resistant to most solutions of acids, alkalis, salts and solvents which can be mixed with water.

Features & Benefits

- WRAS Approved.
- uPVC Approved to BS4346 part 1.
- Lightweight.
- Tight shut off.
- Materials suitable for a wide range of applications.

Pressure & Temperature

Pressure range:-
Up to 10 bar

Temperature Range:-
0°C to 60°C.

SIZE	3/8	1/2	3/4	1	1 1/4	1 1/2	2
A	156	156	168	184	205	228	245
B	93	93	98	107	113	121	123
C	117	117	125	140	152	171	170
D	9.5	12.7	19.1	25.4	31.8	38.1	50.8
E	82	82	82	94	94	117	117