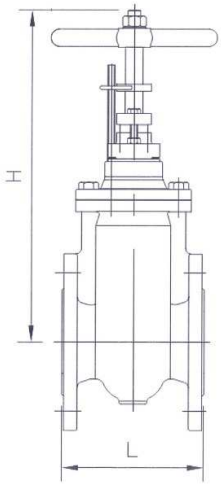

JV060015

Cast Iron
Marine Duty
PN16 Rated
Gate Valve

Flanged PN16/10

Other flange drillings or undrilled on request

Good quality inside screw, non rising stem, non rising handwheel. Suitable for cold and hot water, seawater, saturated steam, oil and other neutral non aggressive liquids.

Approvals, Features & Benefits

- Specifications to DIN 3352 T2
- Marine style with open & shut indicator
- Bolted bonnet
- Inside screw non-rising stem.

Pressure & Temperature

Maximum pressure:-
DN40-DN150 : PN10 rated
DN175-DN300 : PN6 rated

Temperature range:-
-10°C to 120°C

SIZE	DN40	DN50	DN65	DN80	DN100
L	140	150	170	180	190
H	240	255	295	315	345
Flange PCD	110	125	145	160	180
Flange Bolts	4 x M16	4 x M16	4 x M16	8 x M16	8 x M16
Weight Kg	10.5	12	17	21	28

SIZE	DN125	DN150	DN175	DN200	DN250	DN300
L	200	210	210	230	250	270
H	400	430	515	530	635	725
Flange PCD	210	240	270	295	350	400
Flange Bolts	8 x M16	8 x M20	8 x M20	8 x M20	12 x M20	12 x M20
Weight Kg	36	46	54	62	96	140

STANDARD MATERIALS		OPTIONAL MATERIALS (Others available on request)
Body	Cast Iron (GG25)	
Disc	Bronze (LG2)	
Stem	Special Brass (SoMs 59)	Stainless Steel
Bonnet	Cast Iron (GG25)	

All data is designed as a guide and should not be regarded as wholly accurate in every detail
© G.J. Johnson & Sons Ltd
Datasheet No. 060015 - 03/23