


JV160012
Carbon Steel
Thermostatic
Steam Trap
Flanged
PN40

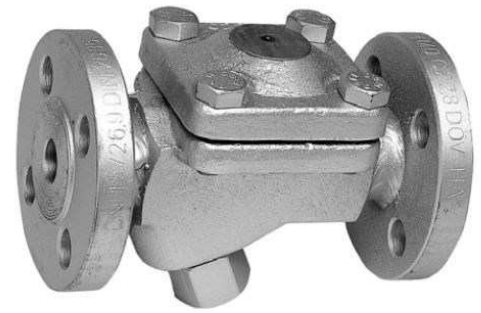

The JV160012 thermostatic steam trap is manufactured and tested in accordance with the DIN standards and the relevant German regulations for steam boilers (TRD) and pressure vessels (AD).

This thermostatic steam trap can be installed in any position only.

Approvals, Features & Benefits

- Manufactured to DIN standards
- Tested to TRD & AD regulations
- Unaffected by water-hammer
- Seat acts as a non-return valve
- Can be fitted in any position

Pressure & Temperature

Max pressure:-
32 bar
Max temperature:-
0°C to 250°C

DN	15	20	25
L	150	150	160
D	95	105	115
b	16	18	18
k	65	75	85
g	45	58	68
i	14	14	14
Weight Kg	3.4	4.1	4.5

MATERIALS

Body & Cover	Carbon Steel
Strainer	Stainless Steel
Thermostatic Capsule	Hastelloy & Stainless Steel
Seat	Stainless Steel (304)
Non-Return Valve	Stainless Steel (304)

Discharge Capacities

