


JV190002

Bronze
Handwheel Operated
Tank Level Gauge
Top & Bottom Set
BSP Threaded

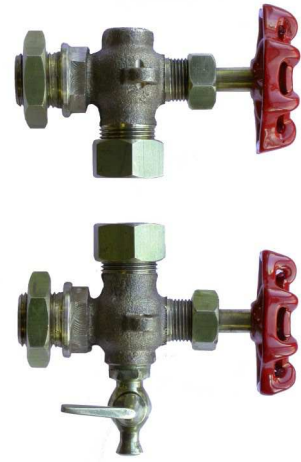

The JV190002 set of bronze wheel operated gauge cocks are suited for general purpose applications, available in standard and lightweight patterns.

The top and bottom fittings have wheel operated valves with a drain cock on the bottom fitting. The bodies are cast with lugs to carry optional guard rods.

Approvals, Features & Benefits

- Cool grip handwheel operation
- Drain cock
- Sight glass tube cut to size on request
- Tube guard protectors on request
- Spare sealing rings available

Pressure & Temperature

Max working pressure:-

Standard : 14 bar

Lightweight : 9 bar

Temperature range:-

Standard : 200°C @ 13 bar

Lightweight : 150°C @ 7 bar

BSP	3/8	1/2	1/2	3/4	3/8	1/2	1/2
Pattern	Standard	Standard	Standard	Standard	Lightweight	Lightweight	Lightweight
Sight Glass Tube Dia.	13	13	16	19	13	13	16
A	44	44	44	51	33	33	29
B	29	29	29	32	25	25	29
C	25	25	25	25	19	19	19
D	44	44	44	57	37	37	38
E	57	57	57	80	58	58	51
Weight Kg	1.19	1.19	1.47	2.01	0.68	0.68	0.73

MATERIALS

Body	Bronze
Fittings	Brass

Glass Sight Tube & Protectors (on request)

It is necessary to state the distance between the centres at which the gauge cocks are to be fitted when ordering.



Optional Bronze Intermediate Arm

To provide extra support for long sight tube installations.

