


FIRE HYDRANT VALVES



MAFM

ANGLED PATTERN DIAPHRAGM TYPE HYDRANT VALVE

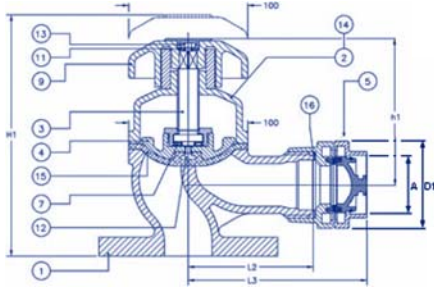

Part No. MAFM-STORZ

BRONZE BODY WITH PN16 FLANGED INLET & STORZ OUTLET C/W CAP

These bolted bonnet diaphragm valves for marine and industrial fire fighting applications and deck wash systems.

They are manufactured to a high standard with a corrosion resistant bronze body and a reinforced EPDM-HT diaphragm ensuring the trim is not in contact with the medium.

They are available with Storz connection as standard but are also available with a wide range of other connection types.

Features & Benefits

- Tightness class DIN3230 & API 598 bubble tight
- Tested to BS5041 & Lloyd's Register of Shipping & RINA approved
- 3.1 material certification on request
- Flanged to ANSI 150 on request
- Spare diaphragms available
- Suited to marine & onshore applications

Pressure & Temperature

Pressure range:-
21 Bar
Temperature Range:-
-10 to 120°C.

SIZE	DN40	DN50	DN65 (Standard)	DN65	DN65
H1	212	222	232	232	232
h1	124	124	124	124	124
L2	105	115	125	125	125
L3	165	175	185	185	185
STORZ TYPE	38	C-52	C-52	65	B-75
øA	52	66	66	81	89
øD1	78	98	98	118	126
WEIGHT Kg			11	12	12

MATERIALS

1 - Body	Bronze	11 - Washer	Stainless Steel (316)
2 - Bonnet	Bronze	12 - Screw	Stainless Steel (316)
3 - Shaft	Brass	13 - Screw	Stainless Steel (316)
4 - Shutter	Bronze	14 - Bolts & Nuts	Stainless Steel (316)
5 - Plug	Brass	15 - Diaphragm	Reinforced EPDM-HT
7 - Bearings	Steel	16 - Gasket	Elastomer
9 - Handwheel	Bronze		

Connections & Adapters

Available in the following:-

Instantaneous BS336
Storz : Gost : NST
NOR : SMS : Form 63
Guillemin : Nakajima : ROTA

