

TUBE – FEMALE – STRAIGHT

FEATURES & BENEFITS


- In-line Configuration with a BSP taper female stud thread
- Enables tube connection to a mating BSP taper male thread



Female Stud Coupling BSPT-Imperial



Female Stud Coupling BSPT-Metric

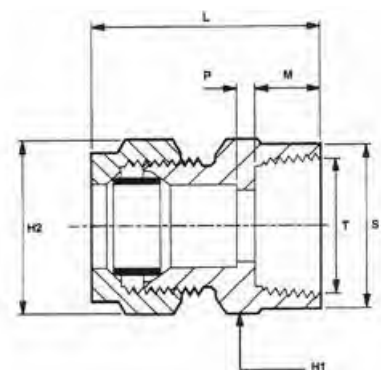

FEMALE STUD COUPLING BSPT-IMPERIAL

Part No	Tube OD.	T BSPT Female Thread	M Stud Length	L Length	H1 Hex A/F	H2 Hex A/F	P Abutment	S Diameter
7083/1	1/4	1/8	0.375	1.031	0.525	0.601	0.093	0.525
7083	1/4	1/4	0.531	1.218	0.71	0.601	0.125	0.71
7083/8	1/4	3/8	0.531	1.218	0.92	0.601	0.125	0.92
7083/11	1/4	1/2	0.687	1.375	1.01	0.601	0.125	1.01
7085	5/16	1/4	0.531	1.218	0.71	0.601	0.125	0.71
7085/8	5/16	3/8	0.531	1.218	0.92	0.601	0.125	0.92
7088/3	3/8	1/4	0.531	1.312	0.71	0.82	0.125	0.71
7088	3/8	3/8	0.531	1.312	0.92	0.82	0.125	0.92
7088/11	3/8	1/2	0.687	1.468	1.01	0.82	0.125	1.01
7091	1/2	1/2	0.687	1.593	1.01	0.92	0.125	1.01

FEMALE STUD COUPLING BSPT-METRIC

Part No	Tube OD.	T BSPT Female Thread	M Stud Length	L Length	H1 Hex A/F	H2 Hex A/F	P Abutment	S Diameter
MC106/164	6	1/4	13.5	46.5	22	12	6	Not applicable
MC108/164	8	1/4	13.5	48	20	14	6	Not applicable