TUBE – MALE – ELBOW

FEATURES & BENEFITS

- 90° Elbow configuration with a BSP taper male stud thread
- Enables tube connection to a mating BSP taper or BSP parallel BS21 female threaded port

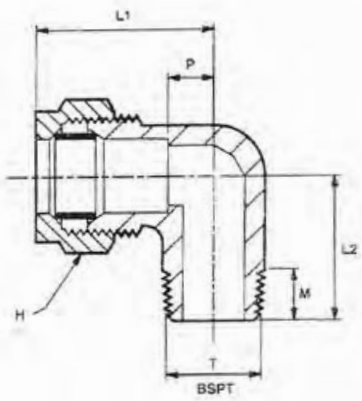

Male Stud Elbow BSPT-Imperial

MALE STUD ELBOW BSPT-IMPERIAL

Part No	Tube OD.	T BSPT Male Thread	M Stud Length	L1 Length	L2 Length	H Hex A/F	P Abutment
8020	1/8	1/8	0.375	0.75	0.718	0.445	0.281
8021	3/16	1/8	0.375	0.75	0.718	0.445	0.281
8023/1	1/4	1/8	0.375	0.937	0.718	0.601	0.375
8023	1/4	1/4	0.531	0.937	0.937	0.601	0.375
8023/8	1/4	3/8	0.531	1.062	1.093	0.601	0.5
8025/1	5/16	1/8	0.375	0.937	0.718	0.601	0.375
8025	5/16	1/4	0.531	0.937	0.937	0.601	0.375
8025/8	5/16	3/8	0.531	1.062	1.093	0.601	0.5
8028/1	3/8	1/8	0.375	1.093	0.937	0.82	0.437
8028/3	3/8	1/4	0.531	1.093	1.093	0.82	0.437
8028	3/8	3/8	0.531	1.093	1.093	0.82	0.437
8028/11	3/8	1/2	0.687	1.218	1.312	0.82	0.562
8031/8	1/2	3/8	0.531	1.218	1.125	0.92	0.437
8031	1/2	1/2	0.687	1.218	1.312	0.92	0.437
8033/11`	5/8	1/2	0.687	1.5	1.5	1.2	0.625
8034	3/4	3/4	0.687	1.687	1.718	1.39	0.781

All data is designed as a guide and should not be regarded as wholly accurate in every detail

TUBE – MALE – ELBOW

FEATURES & BENEFITS

- 90° Elbow configuration with a BSP taper male stud thread
- Enables tube connection to a mating BSP taper or BSP parallel BS21 female threaded port

Male Stud Elbow BSPT-Metric

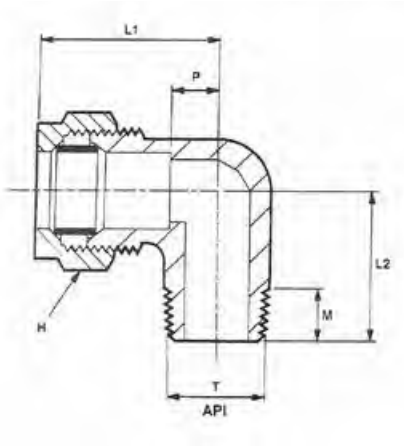

MALE STUD ELBOW BSPT-METRIC

Part No	Tube OD.	T BSPT Male Thread	M Stud Length	L1 Length	L2 Length	H Hex A/F	P Abutment
ME104/083	4	1/8	7	22.5	17	10	10.5
ME106/083	6	1/8	7	24	17	12	10.5
ME106/163	6	1/4	10.5	24	20.5	12	10.5
ME108/083	8	1/8	7	25.5	17	14	10.5
ME108/163	8	1/4	10.5	25.5	20.5	14	10.5
ME108/243	8	3/8	11	28.5	24	14	13.5
ME110/163	10	1/4	10.5	28.5	23.5	19	13.5
ME110/243	10	3/8	11	28.5	24	19	13.5
ME110/323	10	1/2	14.5	36.5	32.5	19	21.5
ME112/163	12	1/4	10.5	31	25.5	22	15.5
ME112/243	12	3/8	11	31	26	22	15.5
ME112/323	12	1/2	14.5	34	32.5	22	18.5
ME115/243	15	3/8	11	40.5	29	24	20
ME115/323	15	1/2	14.5	40.5	32.5	24	20
ME116/323	16	1/2	11	40	29	27	20
ME120/483	20	3/4	16	43.5	37	32	23
ME122/483	22	3/4	16	50.5	42	36	28
ME125/483	25	3/4	16	50.5	42	41	28
ME125/643	25	1	18.5	50.5	44.5	41	28

All data is designed as a guide and should not be regarded as wholly accurate in every detail